

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/EP04/053444

International filing date: 14 December 2004 (14.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: EP
Number: 03029167.8
Filing date: 18 December 2003 (18.12.2003)

Date of receipt at the International Bureau: 24 February 2005 (24.02.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03029167.8

EP / 04 / 53444

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

1950 41 10



Anmeldung Nr:
Application no.: 03029167.8
Demande no:

Anmeldetag:
Date of filing: 18.12.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

SAP Aktiengesellschaft
Neurottstrasse 16
69190 Walldorf
ALLEMAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Method and computer system for device independent document authoring

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G06F17/30

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

2003P00961 EP

1

METHOD AND COMPUTER SYSTEM FOR DEVICE INDEPENDENT
DOCUMENT AUTHORIZING

Field of the Invention

5 The present invention generally relates to electronic data processing, and more particularly, relates to methods, computer program products and systems for device independent document authoring.

10 Background of the Invention

Some software development platforms, such as the Eclipse Platform, are designed for building integrated development environments (IDEs) that can be used to create applications as diverse as web sites, embedded
15 Java™ programs, C++ programs, and Enterprise JavaBeans™.

Current IDEs support the development of user interfaces for applications that are primarily foreseen to interact with a homogenous delivery context (e.g., a
20 screen of low resolution, such as 800x600 pixels.)

However, more and more heterogeneous devices access application servers running applications that have been developed by using an IDE. Developers have to adapt application user interfaces for different types
25 of delivery context. This task becomes increasingly difficult with the prior art IDEs not providing sufficient support for device independent development of user interface documents.

30 Summary of the Invention

The present invention provides computer system, method and computer program product according to the independent claims for improving the support for device independent authoring of user interface documents by

2003P00961 EP

2

generating device class specific information about the complexity of the user interface by device class. A complexity indicator provides this information to the author supporting the author to identify complexity problems in a user interface document related to device class specific restrictions during the development of the document. Thus, the author gains better control of a computer system that includes the complexity indicator and is used for the development of user interfaces for various device classes, because the complexity indicator enables the author to quickly identify and solve problems of the user interface document related to device specific restrictions.

High complexity of a user interface typically has a negative impact on the usability of the user interface. Identifying such problems at early stages of the development usually minimizes efforts for adjusting the document to better comply with the various device class specific restrictions. A result of the device specific document analysis with the complexity indicator can also be that a user interface document cannot be used at all by devices belonging to a specific device class. In this case the author may not release the user interface document for the specific device class.

The aspects of the invention will be realized and attained by means of the elements and combinations particularly pointed out in the appended claims. Also, the described combination of the features of the invention is not to be understood as a limitation, and all the features can be combined in other constellations without departing from the spirit of the invention. It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention as described.

Brief Description of the Drawings

- FIG. 1 illustrates a complexity indicator according to
5 the invention as being part of an IDE;
FIG. 2 shows an alternative implementation of the
complexity indicator with an abstraction layer;
and
FIG. 3 shows an implementation of a complexity display
10 when integrated into the IDE main window.

Detailed Description of the Invention

- FIG. 1 is a simplified block diagram of an integrated
development environment 999 (IDE) that can be used for
15 the development of user interface documents. The IDE
can be implemented as a computer program running on a
computer system that includes one or more computing
devices. The IDE 999 includes an editor 104 for editing
405 documents, such as a user interface document 300,
20 and an adaptation engine 105 for generating 420 device
class dependent representations 301, 302 of the
document 300. The IDE further includes a complexity
indicator 121 for calculating complexity values with
respect to the device specific representations 301,
25 302. The complexity indicator can be implemented as a
computer program product having instructions that when
loaded into a memory of the computer system can be
executed by at least one processor of the computer
system to perform an evaluation of the complexity of
30 the user interface.

In the following description, by way of example,
the user interface document 300 includes a document
description in a Renderer Independent Markup Language

2003P00961 EP

4

(RIML). However, the present invention can be applied to any other document type, such as documents written in Hypertext Markup Language (HTML), Extensible Markup Language (XML), Java, etc. RIML is an XML based markup language. The user interface document can be stored in
5 form of a file or any other suitable data structure.

The complexity indicator 121 provides special support for the development of documents that are used in mobile applications and, therefore, need to be
10 compatible with a variety of device classes. A device class includes a plurality of restrictions that are typical for devices (e.g., mobile devices) belonging to the device class.

Adaptation engines, such as the consensus
15 adaptation engine, are known in the art. The adaptation engine 105 is used to generate 420 the device class specific representations 301, 302 of the document 300. In general, the document 300 includes a layout component hierarchy 320. This hierarchy 320 can be
20 adapted to various device classes DC1, DC2 in different ways. This may result in the different representations 301, 302 of the document 300 for various device classes DC1, DC2. For example, a specific layout component 3 may be suitable for a first device class DC1 but not a
25 second one DC2. This specific layout component 3 can be suppressed by the adaptation engine 103 for the second device class DC2 and, therefore, does not become part of the document's representation 302 for the second device class DC2. An appropriate preview tool may allow
30 the author to choose a specific emulator for a preview. The output of the adaptation engine 103 is generated for the chosen emulator. The author can browse through generated sub-pages in the preview of the document.

The complexity indicator 121 has a complexity
35 evaluation library 121-1 for evaluating the complexity

2003P00961 EP

5

of layout components 1 to 9 used in the document 300 or
its device specific representations 301, 302 and
further has a complexity display 121-2 for visualizing
440 the result of the complexity evaluation. High
5 complexity of layout components usually has a negative
impact on the usability of the user interface that
includes the layout components.

The adaptation engine 105 receives 410 the
document 300 as input and generates 420 device specific
10 representations of the document considering specific
constraints of a device class (e.g., limited display
area, memory constraints). In the example, a first
representation 301 is generated for device class DC1
and a second representation 302 is generated for device
15 class DC2. Each representation can have a layout
component hierarchy 321, 322 that is different from the
one 320 of the original document 300. In the example,
the adaptation engine removed layout component 4 when
generating the first representation 301 and layout
20 component 3, when generating the second representation
302.

The complexity indicator 121 receives 430
information about layout components 1 to 9 and how
these layout components are built into the layout
25 component hierarchies 321, 322 of the document
representations 301, 302. A layout component can
include multiple basic layout elements (e.g., input
fields) and group these layout elements in such a way
that a specific function of the document (e.g.,
30 performing a search) is bundled in the layout
component. Sometimes layout components are also
referred to as controls.

The complexity indicator 121 determines the layout
components and the layout component hierarchy 321, 322
35 of the respective representation 301, 302.

2003P00961 EP

6

Further, the complexity indicator 121 calculates a complexity value for each layout component in its respective representation 301, 302. This can be achieved by using a complexity evaluation library 121-1 of the complexity indicator 121. It is sufficient that the complexity indicator can access the library 121-1, which may also be stored elsewhere within the IDE 999. The library 121-1 includes a set of complexity evaluation functions EF5-DC1, EF5-DC2, EF6-DC1, EF6-DC2, etc. Preferably, such an evaluation function exists for each layout component with respect to the various device classes DC1, DC2. This can also be achieved by associating the evaluation functions with specific layout component types, where each layout component is an instance of the respective layout component type. The association of the evaluation functions with the respective layout components is illustrated by a solid line between a layout component and its respective evaluation functions.

The complexity indicator 121 applies the evaluation functions for the various device classes to the associated layout components of the respective representations 301, 302. Each applied evaluation function returns a complexity value for the respective layout component. For example, return values may range from 1 to 10, where 1 indicates a low complexity of the component and 10 indicates a high complexity of the component. Any other appropriate measure can be used instead. Evaluation criteria used by the evaluation functions can, for example, refer to the number of items that can be displayed simultaneously in the display area of a specific device class or to the number of broken links of the layout component, dependent of the component layout type.

2003P00961 EP

7

Coding section 1 shows an example of an evaluation function for a select layout element in a PDA device class. For example, a Palm Pilot belongs to the PDA device class. The basic assumption is that a reasonable number of items displayed on the Palm Pilot should not exceed 12.

Coding section 1:

```
10  int n = number of options
    bool sortedList = ?
    int items (area size ) = 12
    int UnsortedMaximalLevelTragetKnown = 36
    int MaxScreens = 6.5
15  IF (sortedList = TRUE)
        IF n <= items (area size ) return 1
        IF ((x <= MaxScreens) && (n <= x * items (area size) ) )
            return x
        ELSE return 10
```

20 Coding section 2 shows an example of an evaluation function for a select layout element in a cell phone device class. For example, a Nokia 7650 belongs to the cell phone device class. The basic assumption is that a reasonable number of items displayed on the Nokia 7650 should not exceed 7.

Coding section 2:

```
    int n = number of options
30  bool sortedList = ?
    int items (area size ) = 7
    int UnsortedMaximalLevelTragetKnown = 20
    int MaxScreens = 5.5
    IF (sortedList = TRUE)
35        IF n <= items (area size ) return 1
```

2003P00961 EP

8

```
IF ((x <= MaxScreens) && (n <= x * items (area size) ) )  
return x  
ELSE return 10
```

- 5 Then, the complexity indicator aggregates the
returned complexity values for the various
representations 301, 302 according to the respective
layout component hierarchies 321, 322. Aggregate
complexity values can be determined for the various
10 levels in the layout component hierarchies 321, 322.
- For example, layout component 2 may represent a
menu that includes two sub-menus (layout components 5
and 6). When applying the evaluation functions EF5-DC1
and EF6-DC1 to the sub-menus 5, 6 for the first device
15 class DC1 (first representation 301), the aggregation
algorithm may propagate the maximum complexity value of
both sub-menus to the menu 2, assuming that the
complexity value of the menu 2 cannot be less than the
highest complexity value of its sub-menus. The same
20 applies to the second device class DC2 when applying
the evaluation functions EF5-DC2 and EF6-DC2. However,
even in case that both sub-menus 5, 6 have a low
complexity value, the overall complexity of the menu 2
can still be higher. Therefore, in addition to
25 propagating complexity values of child nodes in the
layout component hierarchy to the parent node, an
evaluation function can be applied directly to the
parent node. For example, the sub-menus can have
complexity values of "3" and "5". However, the usage of
30 both sub-menus in the menu 2 can lead to a complexity
value "7" for the menu 2 (parent node) itself. Thus,
the propagated complexity value of the sub-menus
 $\max("3"; "5") = "5"$ would be overruled by the complexity
indicator with the higher complexity value "7" that is
35 directly calculated for the parent node (menu 2).

The complexity indicator can then visualize 440 the various complexity values for the author in a complexity display 121-2. For example, the aggregate complexity values "4" and "8" for the respective
5 component hierarchies 321, 322 can be displayed for each device class DC1, DC2.

FIG. 2 illustrates an alternative implementation of the complexity indicator 121, where the complexity
10 indicator processes complexity evaluation hierarchies instead of layout component hierarchies. For this purpose, the complexity indicator 121 can include a transformer 121-3 that can transform the layout component hierarchy 321, 322 of each representation
15 301, 302 into a corresponding markup language independent complexity evaluation hierarchy 521, 522. The complexity evaluation hierarchy 521, 522 includes the same information as the respective layout component hierarchy 321, 322 but is described in a generic
20 language to which the evaluation functions can be applied. Using a language independent complexity evaluation hierarchy enables the complexity indicator to use a single set of evaluation functions being associated with components c1 to c9 of the complexity
25 evaluation hierarchy 521, 522 in the complexity library 121-1. This association becomes independent from the markup language being used for the original document 300 or its device specific representations 301, 302. The complexity hierarchy layer is an abstraction layer
30 between the representations 301, 302 and the complexity evaluation functions of the library 121-1 that helps to avoid that an evaluation function for a layout component needs to be redundantly provided for various markup languages, such as RIML, XHTML, HTML, etc.

2003P00961 EP

10

FIG. 3 shows an alternative implementation of the complexity display 121-2 when integrated into the IDE graphical user interface (GUI).

The complexity values for each device class DC1, DC2 are visualized as graphical bars 21, 22. In the example, complexity values increase from the left value 1 to the right value 10. Threshold values T1, T2 are used to change the appearance of the bars 21, 22 dependent on the visualized threshold value. For example, complexity values below T1 have a first grid structure or a first colour. Complexity values between T1 and T2 have a second grid structure or a second colour and complexity values above T2 have a third grid structure or a third colour. Other presentations, such as traffic lights changing the colour when exceeding a threshold value, are also possible.

The complexity display 121-2 further can have a drill down section 121-2', where complexity values can be shown on different hierarchy levels down to the complexity of an isolated layout component for a selected device class. In the example, the drill down is made for the second device class DC2. Apparently, the high complexity value originates from the layout component 2, whereas the complexity value of layout components 4 and 7 is relatively low. A further drill down can be made for each of the layout components to determine the origin of high complexity values.

A tree-based outline editor 109 can be interfaced to the complexity indicator 121 so that, when it is displayed simultaneously on the IDE GUI, a layout component that is selected in the complexity display 121-2 is highlighted in the component hierarchy 322 shown in the tree-based outline editor 109.

In general, the tree-based outline editor 109 can generate an outline view of the edited document 300 or

2003P00961 EP

11

its device specific representation 301, 302, such as an XML tree view of a RIML document. For example, the outline view can be a graphical display of the corresponding layout component hierarchy.

5 In this example the tree-based outline editor 109 displays the layout component hierarchy 322 of the respective representation 302 that corresponds to the device class DC2 that is currently drilled down in the complexity indicator.

10

Embodiments of the invention can be implemented in digital electronic circuitry, or in computer hardware, firmware, software, or in combinations of them. The invention can be implemented as a computer program
15 product, i.e., a computer program tangibly embodied in an information carrier, e.g., in a machine-readable storage device or in a propagated signal, for execution by, or to control the operation of, data processing apparatus, e.g., a programmable processor, a computer,
20 or multiple computers. An computer program for device dependent authoring of user interface documents including a complexity indicator as described above can be written in any form of programming language, including compiled or interpreted languages, and it can
25 be deployed in any form, including as a stand-alone program or as a module, component, subroutine, or other unit suitable for use in a computing environment. A computer program can be deployed to be executed on one computer or on multiple computers at one site or
30 distributed across multiple sites and interconnected by a communication network.

Method steps of the invention can be performed by one or more programmable processors executing a computer program to perform functions of the invention
35 by operating on input data and generating output. Method steps can also be performed by, and apparatus of the invention can be implemented as, special purpose

2003P00961 EP

12

logic circuitry, e.g., an FPGA (field programmable gate array) or an ASIC (application-specific integrated circuit).

Processors suitable for the execution of a
5 computer program include, by way of example, both
general and special purpose microprocessors, and any
one or more processors of any kind of digital computer.
Generally, a processor will receive instructions and
data from a read-only memory or a random access memory
10 or both. The essential elements of a computer are at
least one processor for executing instructions and one
or more memory devices for storing instructions and
data. Generally, a computer will also include, or be
operatively coupled to receive data from or transfer
15 data to, or both, one or more mass storage devices for
storing data, e.g., magnetic, magneto-optical disks, or
optical disks. Information carriers suitable for
embodying computer program instructions and data
include all forms of non-volatile memory, including by
20 way of example semiconductor memory devices, e.g.,
EPROM, EEPROM, and flash memory devices; magnetic
disks, e.g., internal hard disks or removable disks;
magneto-optical disks; and CD-ROM and DVD-ROM disks.
The processor and the memory can be supplemented by, or
25 incorporated in special purpose logic circuitry.

To provide for interaction with a user, the
invention can be implemented on a computer having a
display device, e.g., a cathode ray tube (CRT) or
liquid crystal display (LCD) monitor, for displaying
30 information to the user and a keyboard and a pointing
device, e.g., a mouse or a trackball, by which the user
can provide input to the computer. Other kinds of
devices can be used to provide for interaction with a
user as well; for example, feedback provided to the
35 user can be any form of sensory feedback, e.g., visual
feedback, auditory feedback, or tactile feedback; and

2003P00961 EP

13

input from the user can be received in any form, including acoustic, speech, or tactile input.

5 The invention can be implemented in a computing system that includes a back-end component, e.g., as a data server, or that includes a middleware component, e.g., an application server, or that includes a front-end component, e.g., a client computer having a graphical user interface or a Web browser through which a user can interact with an implementation of the

10 invention, or any combination of such back-end, middleware, or front-end components. The components of the system can be interconnected by any form or medium of digital data communication, e.g., a communication network. Examples of communication networks include a

15 local area network (LAN) and a wide area network (WAN), e.g., the Internet.

The computing system can include clients and servers. A client and server are generally remote from each other and typically interact through a

20 communication network. The relationship of client and server arises by virtue of computer programs running on the respective computers and having a client-server relationship to each other.

2003P00961 EP

14

Claims

1. A computer implemented complexity indicator (121) having instructions for evaluating the complexity of a user interface that has device class specific representations (301, 302), each device class specific representation (301, 302) referring to a respective device class (DC1, DC2) and having a respective layout component hierarchy (321, 322); the complexity indicator (121) comprising:
- 5 a library (121-1) having complexity evaluation functions (EF5-DC1, EF5-DC2, EF6-DC1, EF6-DC2) for determining complexity values of layout components (1 to 9) of the respective layout component hierarchies (321, 322), where each complexity evaluation function (EF5-DC1, EF5-DC2, EF6-DC1, EF6-DC2) is associated with the layout component (5, 6) to which it is applied; and
- 10 means for aggregating the complexity values by device class according to the corresponding layout component hierarchy (321, 322) of the respective device class specific representation (301, 302).
- 15
- 20

2003P00961 EP

15

2. The complexity indicator of claim 1, further comprising:
a transformer (121-3) for transforming the layout component hierarchy (321, 322) of each representation (301, 302) into a corresponding complexity evaluation hierarchy (521, 522) so that the association of each evaluation function (EF5-DC1, EF5-DC2, EF6-DC1, EF6-DC2) with its respective layout component (5, 6) is redirected through the corresponding component (c5, c6) of the respective complexity evaluation hierarchy (521, 522) and the evaluation function is applied to the corresponding component (c5, c6) of the respective complexity evaluation hierarchy (521, 522).
3. The complexity indicator of claim 1 or 2, further comprising:
a complexity display (121-2) for visualizing the aggregate complexity values by device class.
4. The complexity indicator of claim 3, wherein the complexity display (121-2) has a drill down portion (121-2') for visualizing complexity values of layout components (2, 4, 7) related to a selected device class (DC2).
5. The complexity indicator of claim 4 in combination with
a tree-based outline editor (109) for generating an outline view (322) of the representation (302) that corresponds to the selected device class (DC2) configured to highlight a layout component that is selected in the complexity display (121-2) for drill down purposes.

2003F00961 EP

16

6. A computer implemented method for complexity evaluation of a user interface, comprising the steps of:

5 receiving (430) device class specific representations (301, 302) of the user interface, wherein each device class specific representation (301, 302) refers to a respective device class (DC1, DC2);

10 determining complexity values of layout components (1 to 9) of the device class specific representations (301, 302) by applying complexity evaluation functions (EF5-DC1, EF5-DC2, EF6-DC1, EF6-DC2) that are associated with respective layout components (5, 6); and

15 aggregating the complexity values by device class according to a corresponding layout component hierarchy (321, 322) of the respective device class specific representation (301, 302).

20 7. The method of claim 6, further comprising the step of:

transforming the layout component hierarchy (321, 322) of each representation (301, 302) into a corresponding complexity evaluation hierarchy

25 (521, 522) so that the association of each evaluation function (EF5-DC1, EF5-DC2, EF6-DC1, EF6-DC2) with its respective layout component (5, 6) is redirected through the corresponding component (c5, c6) of the

30 respective complexity evaluation hierarchy (521, 522) and the evaluation function is applied to the corresponding component (c5, c6) of the respective complexity evaluation hierarchy (521, 522).

35

2003P00961 EP

17

8. The method of claim 6 or 7, further comprising the step of:
visualizing the aggregate complexity values by device class.
- 5
9. The method of claim 8, wherein the visualizing step comprises:
visualizing complexity values of layout components (2, 4, 7) related to a selected device class (DC2) in a drill down portion (121-2').
- 10
10. A computer system having at least one computing device configured to run an integrated development environment (999) that comprises a complexity indicator (121) according to any one of the claims 1 to 4.
- 15
11. The computer system of claim 10 when dependent on claim 4, wherein the integrated development environment (999) further comprises:
a tree-based outline editor (109) for generating an outline view (322) of the representation (302) that corresponds to the selected device class (DC2) configured to highlight a layout component that is selected in the complexity display (121-2) for drill down purposes.
- 20
- 25
- 30

2003P00961 EP

18


METHOD AND COMPUTER SYSTEM FOR DOCUMENT AUTHORIZING**Abstract of the Invention**

Method and computer system for evaluating the
5 complexity a user interface. A complexity indicator
(121) receives (430) device class specific
representations (301, 302) of the user interface. Each
device class specific representation (301, 302) refers
to a respective device class (DC1, DC2). The complexity
10 indicator (121) determines complexity values of layout
components (1 to 9) of the device class specific
representations (301, 302) by using complexity
evaluation functions (EF5-DC1, EF5-DC2, EF6-DC1, EF6-
DC2), associated with the layout components (5, 6) and
15 aggregates the complexity values by device class
according to a corresponding layout component hierarchy
(321, 322) of the respective device class specific
representation (301, 302).

20 FIG. 1

1/3

2003P00961 EP

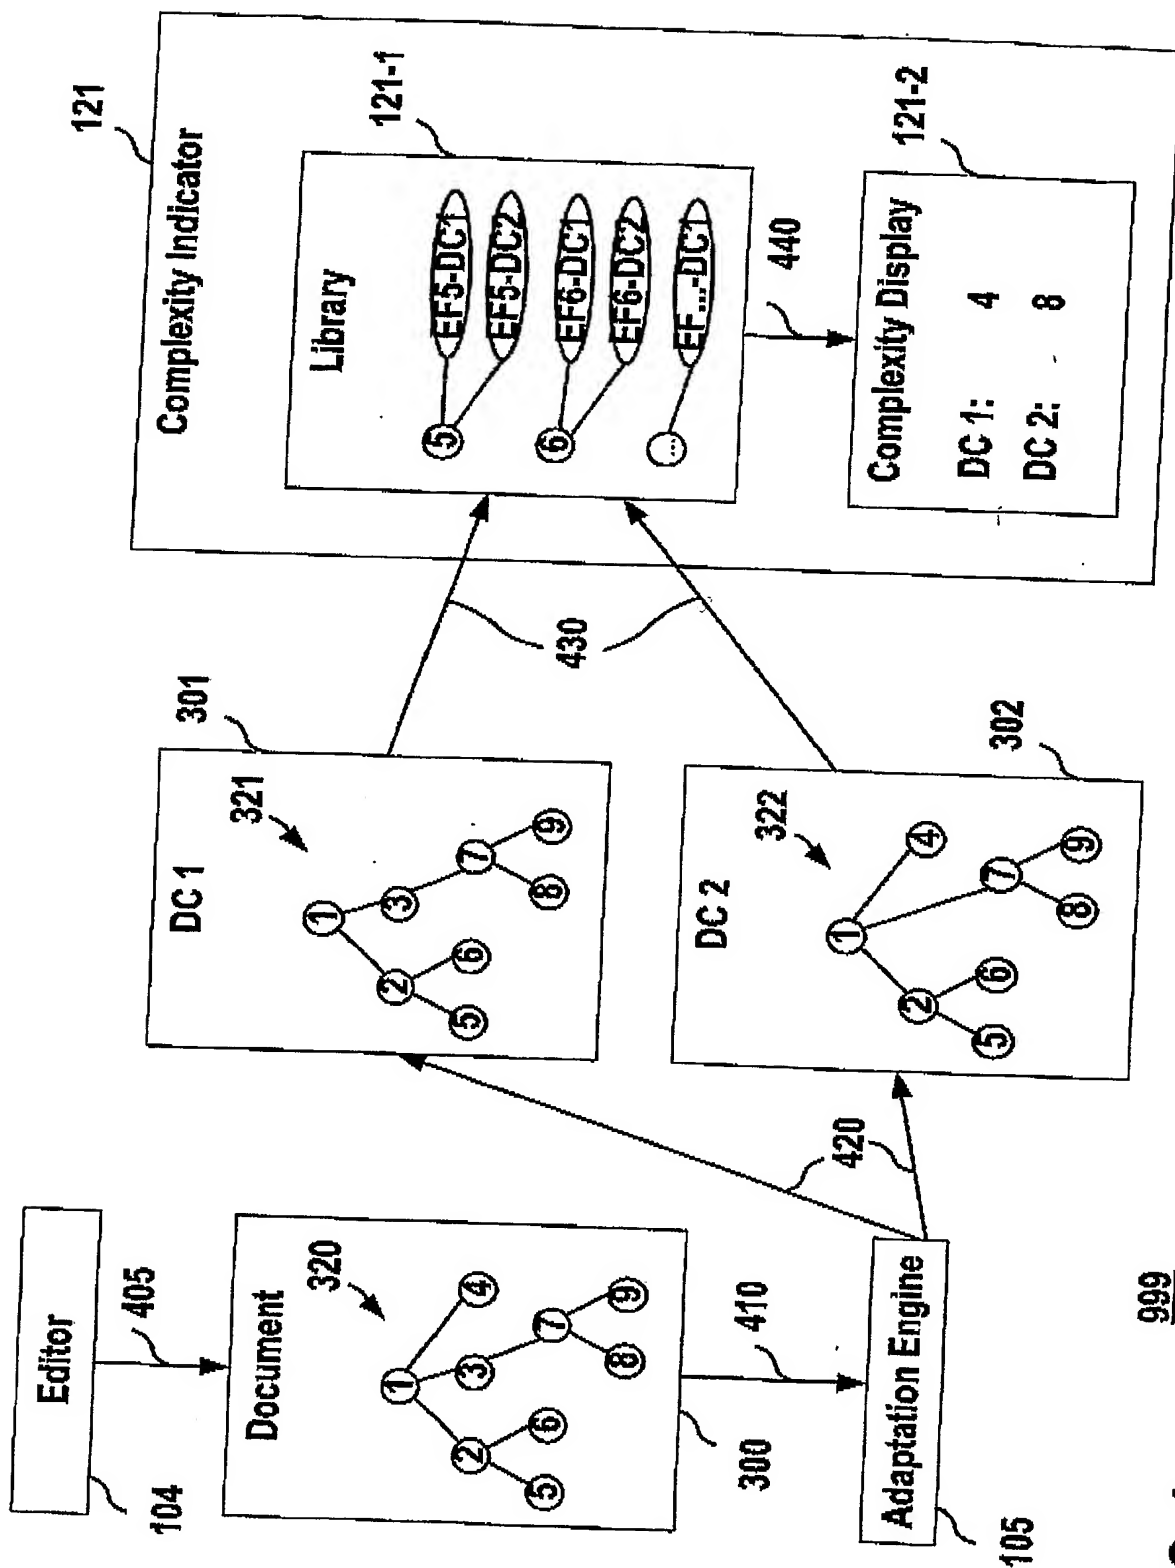

999


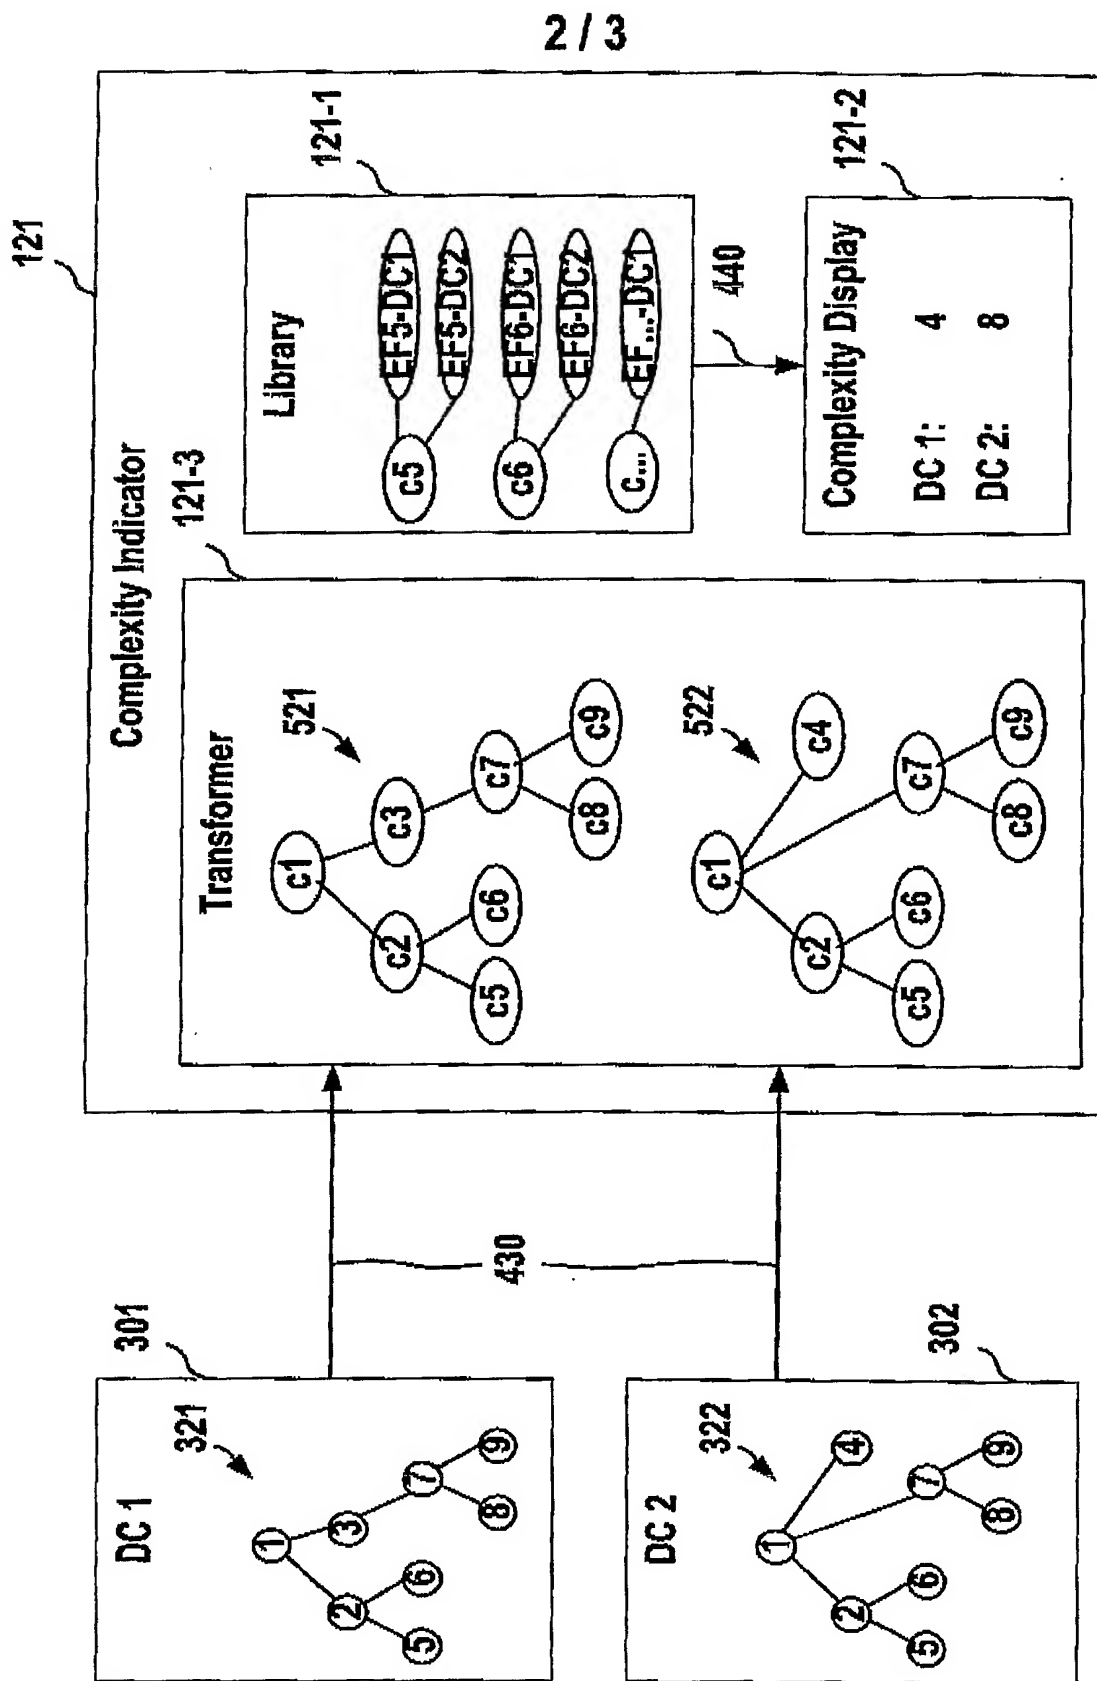


FIG. 2

999

3 / 3

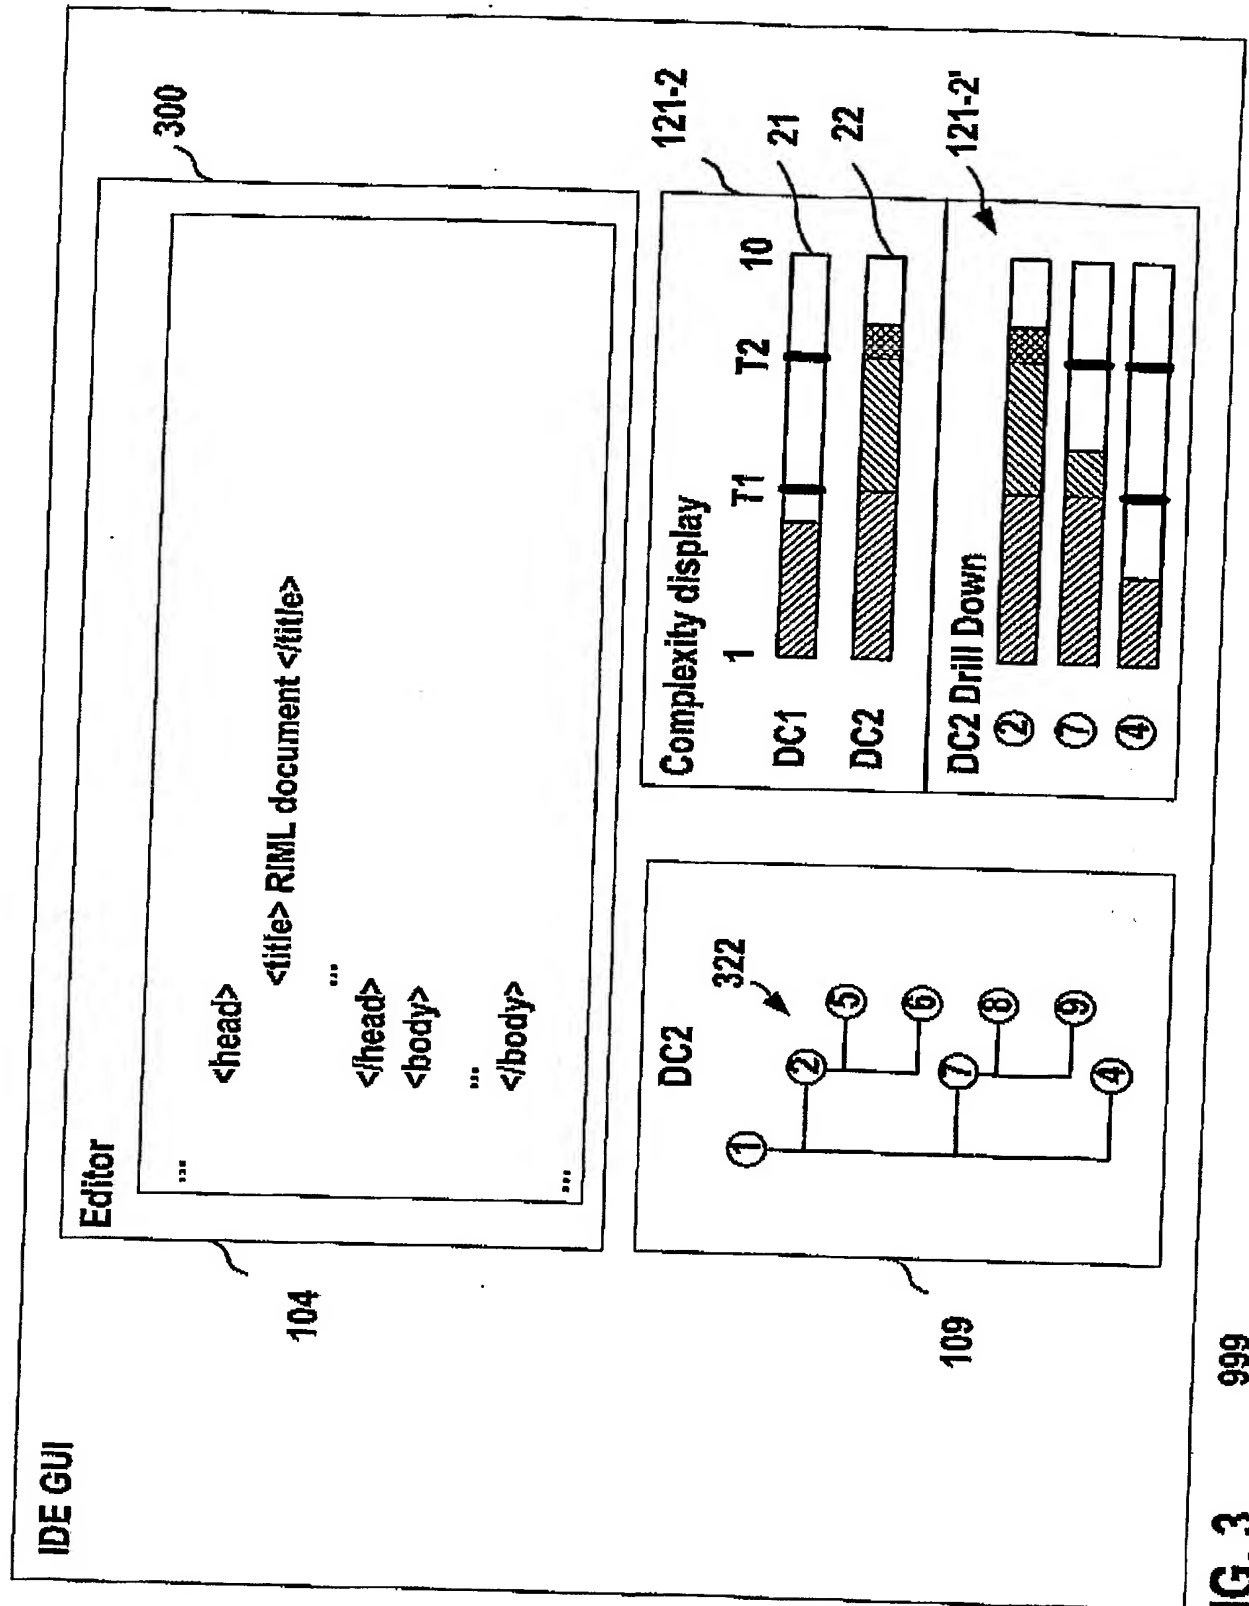

2003P00961 EP

FIG. 3 999

